

# PKA-M R32

## Wall Mounted System

### Standard Inverter Heat Pump

Mr. SLIM™

The **PKA-M Standard Inverter** range is a wall mounted system that blends a host of outstanding features with a sophisticated, streamlined design. Offering advanced control options and quiet operation, this range provides extreme flexibility and ease of installation whilst being cost effective.

**R32**

#### Key Features & Benefits:

- Improved airflow control, including adjustable louvres for uniform air distribution
- Internal pipe connection to wall mounted unit for easy and neat installation
- CN22 connector as standard for connection to PAR-40MAA hard wired controller
- Replace Technology available








PKA-M INDOOR UNITS		PKA-M100KA	PKA-M100KA
CAPACITY (kW)	Heating (nominal)	11.2 (2.8-12.5)	11.2 (2.8-12.5)
	Cooling (nominal)	9.5 (4.0-10.6)	9.5 (4.0-10.6)
	Heating (UK)	9.63 (2.41-10.75)	9.63 (2.41 - 10.75)
	Cooling (UK)	8.65 (3.64-9.65)	8.65 (3.64 - 9.65)
SHF (nominal)		0.73	0.73
COP / EER (nominal)		3.41 / 3.23	3.41 / 3.23
SCOP (ηsh) / SEER (ηsc) (BS EN14825)		4.00 / 5.80	4.00 / 5.80
ErP ENERGY EFFICIENCY CLASS	Heating/Cooling	A+ / A+	A+ / A+
AIRFLOW (l/s)	Lo-Mi-Hi	333-383-433	333-383-433
PIPE SIZE mm (in)	Gas	15.88 (5/8")	15.88 (5/8")
	Liquid	9.52 (3/8")	9.52 (3/8")
SOUND PRESSURE LEVEL (dBA)	Lo-Mi-Hi	41-45-49	41-45-49
SOUND POWER LEVEL (dBA)		65	65
DIMENSIONS (mm)	Width x Depth x Height	1170 x 295 x 365	1170 x 295 x 365
WEIGHT (kg)		21	21
ELECTRICAL SUPPLY		Fed by Outdoor Unit	Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)		6	6
INTERCONNECTING CABLE No. CORES		4	4
WIRED REMOTE CONTROLLER REFERENCE		PAR-40MAA	PAR-40MAA
WIRELESS REMOTE CONTROLLER REFERENCE		PAR-FL32MA	PAR-FL32MA

PUZ-M OUTDOOR UNITS		PUZ-M100VAR1	PUZ-M100YAR1 <sup>③</sup>
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling	51 / 54	51 / 54
SOUND POWER LEVEL (dBA)	Cooling	70	70
WEIGHT (kg)		76	78
DIMENSIONS (mm)	Width x Depth x Height	1050 x 330 x 981	1050 x 330 x 981
ELECTRICAL SUPPLY		220-240v, 50Hz	380-415v, 50Hz
PHASE		Single	Three
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	3.28 / 2.94	3.28 / 2.94
	Heating/Cooling (UK)	2.95 / 2.44	2.95 / 2.44
STARTING CURRENT (A)		14.2	5.1
SYSTEM RUNNING CURRENT (A)	Heating/Cooling [MAX]	14.2 / 12.7 [20]	5.1 / 4.6 [11.5]
FUSE RATING (BS88) - HRC (A)		32	16
MAINS CABLE No. CORES		3	5
MAX PIPE LENGTH (m)		55	55
MAX HEIGHT DIFFERENCE (m)		30	30
CHARGE REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) - R32 (GWP 675)		3.10 / 2.09	3.10 / 2.09
MAX ADDITIONAL REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) - R32 (GWP 675)		4.10 / 2.77	4.10 / 2.77

③ Three Phase

### PKA-M100KA DIMENSIONS

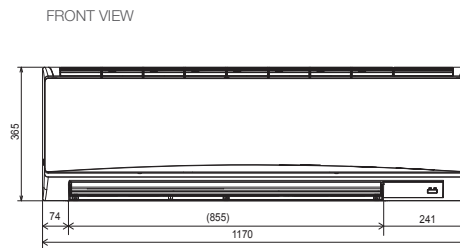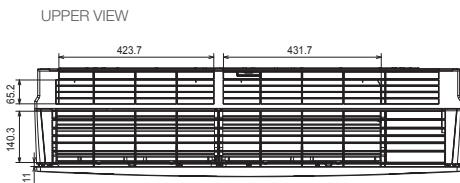

[f @kencar.net](https://www.facebook.com/kencar.net)
[@kencar\\_group](https://www.instagram.com/kencar_group)
[in @kencar group](https://www.linkedin.com/company/kencar_group)

Web: [www.kencar.net](http://www.kencar.net)
 E-mail: [sales@kencar.net](mailto:sales@kencar.net)
 Tel: +356 2138 2091